



Approved
7-14-04

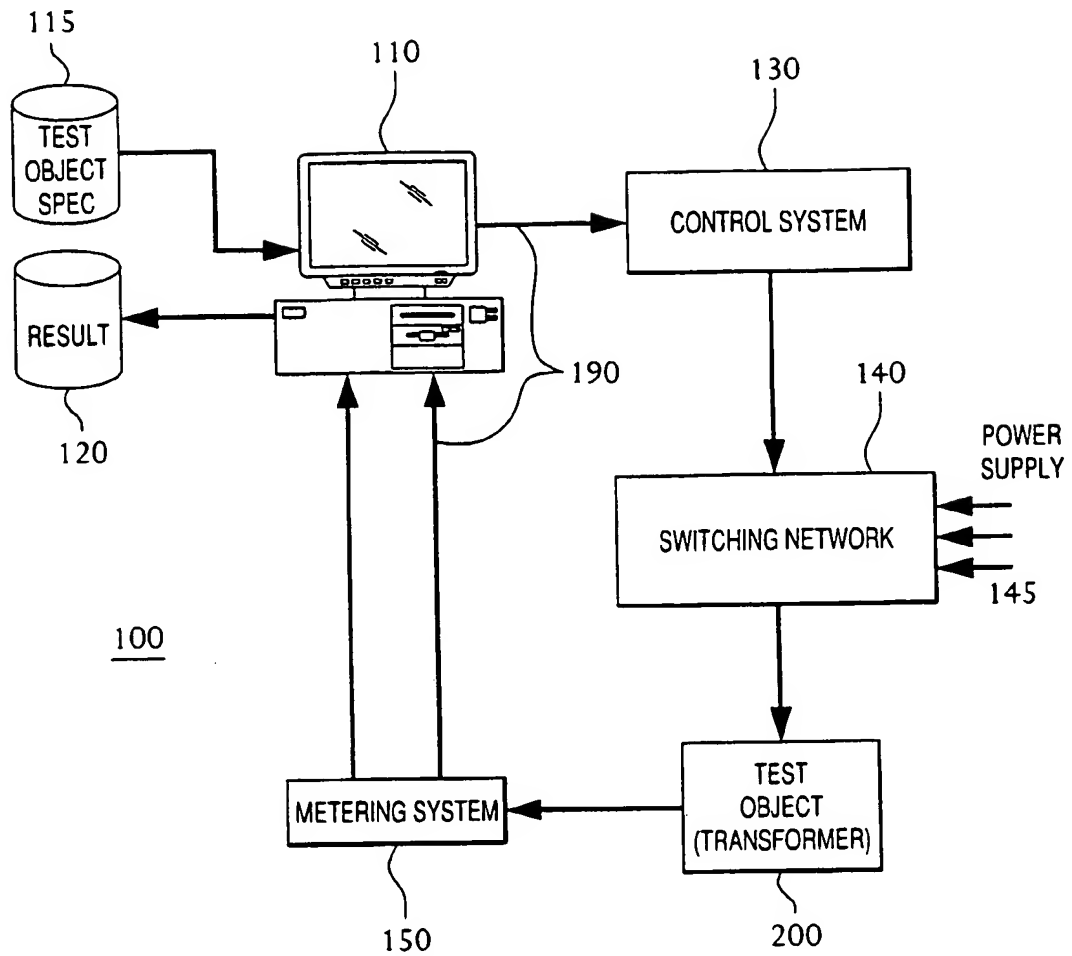


FIG. 1

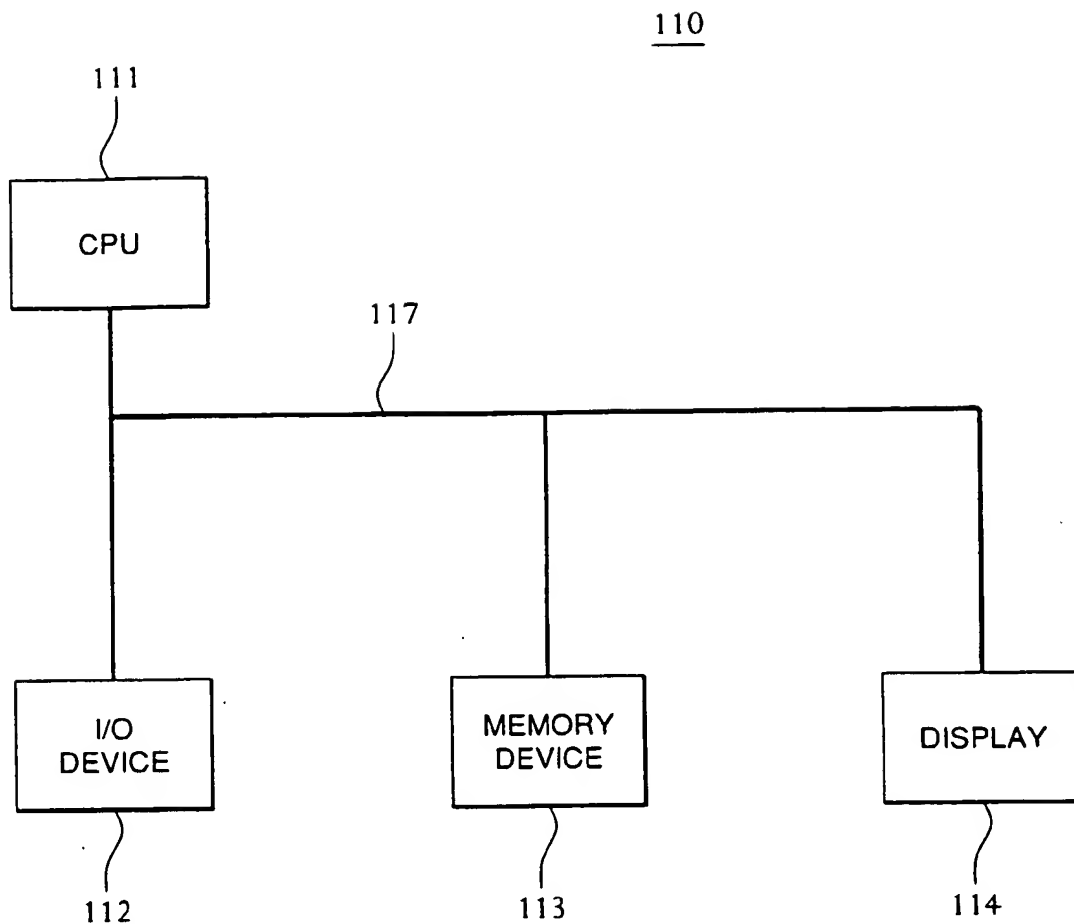


FIG. 2

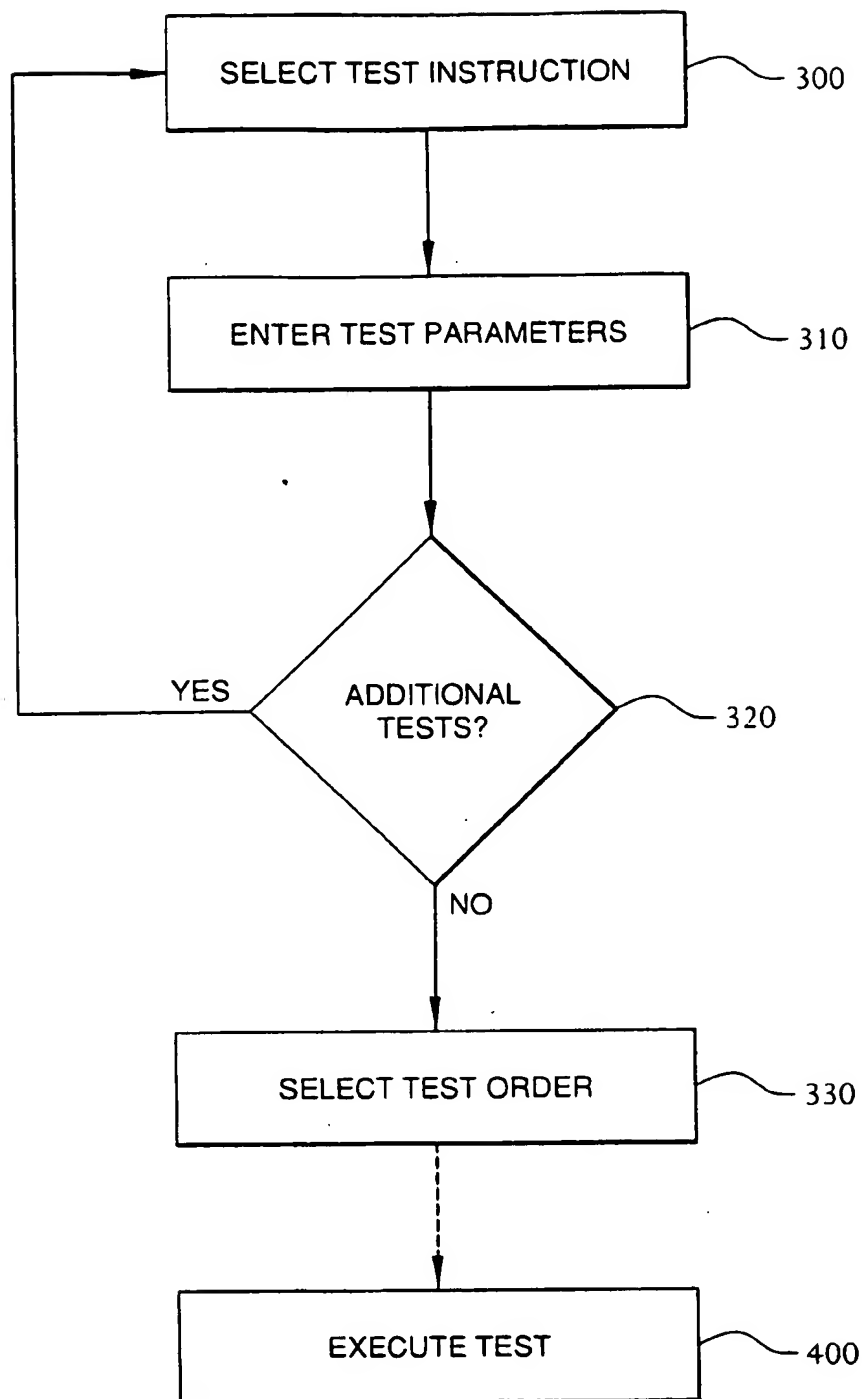


FIG. 3

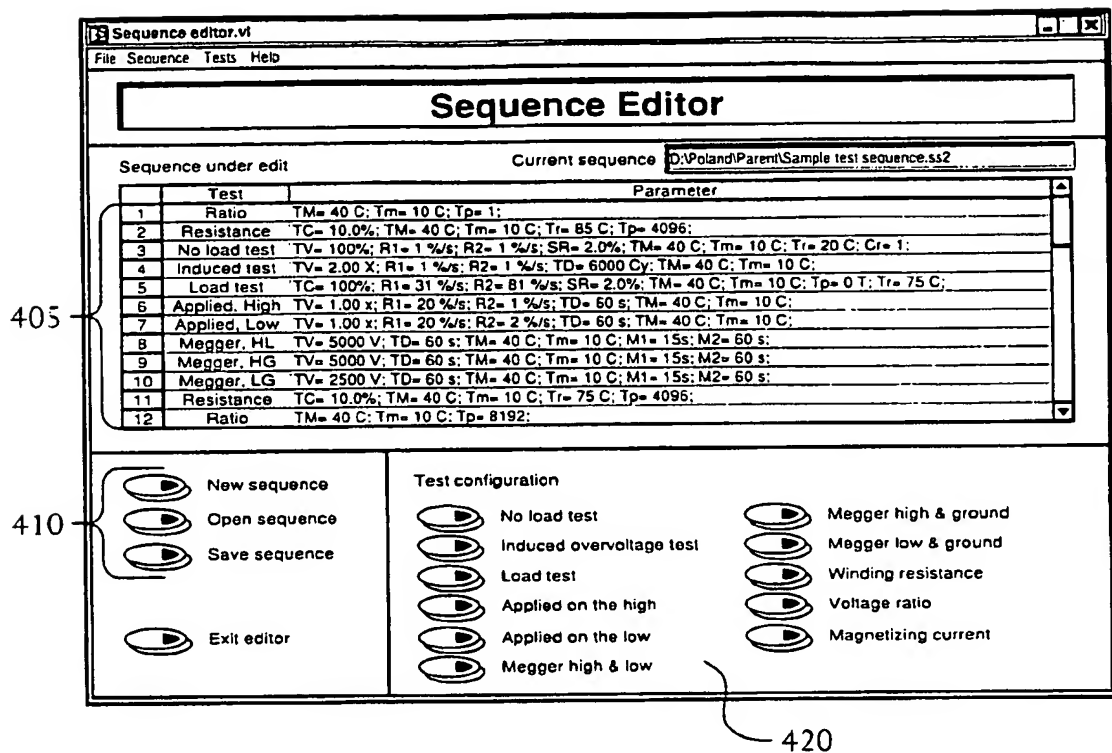


FIG. 4

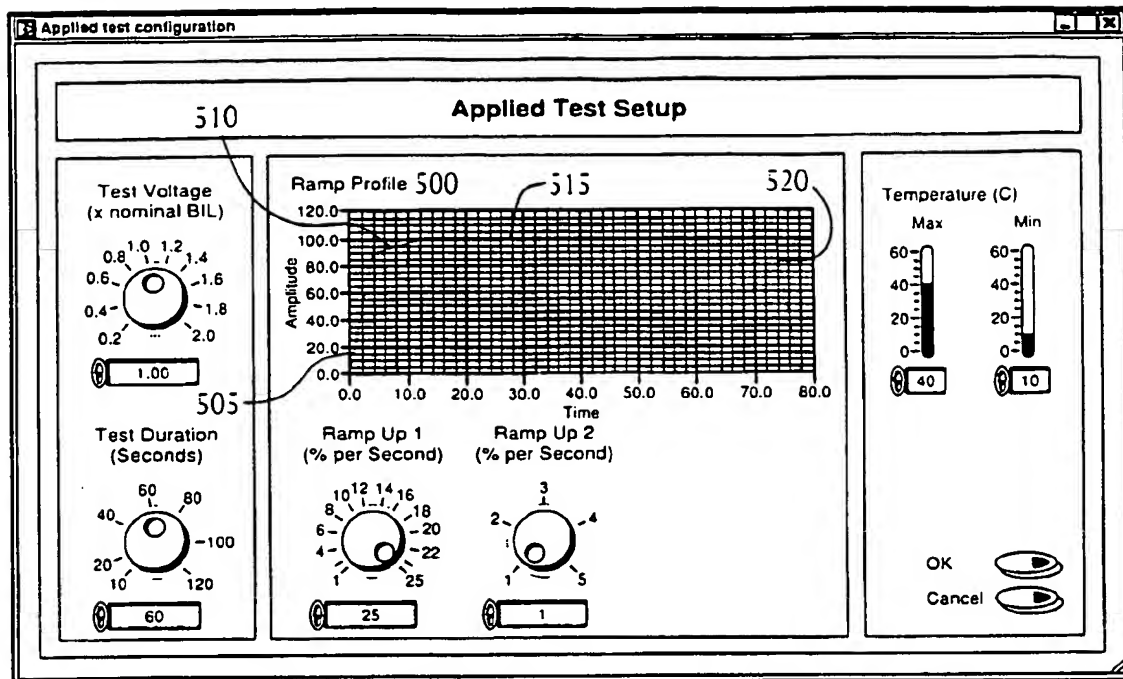


FIG. 5

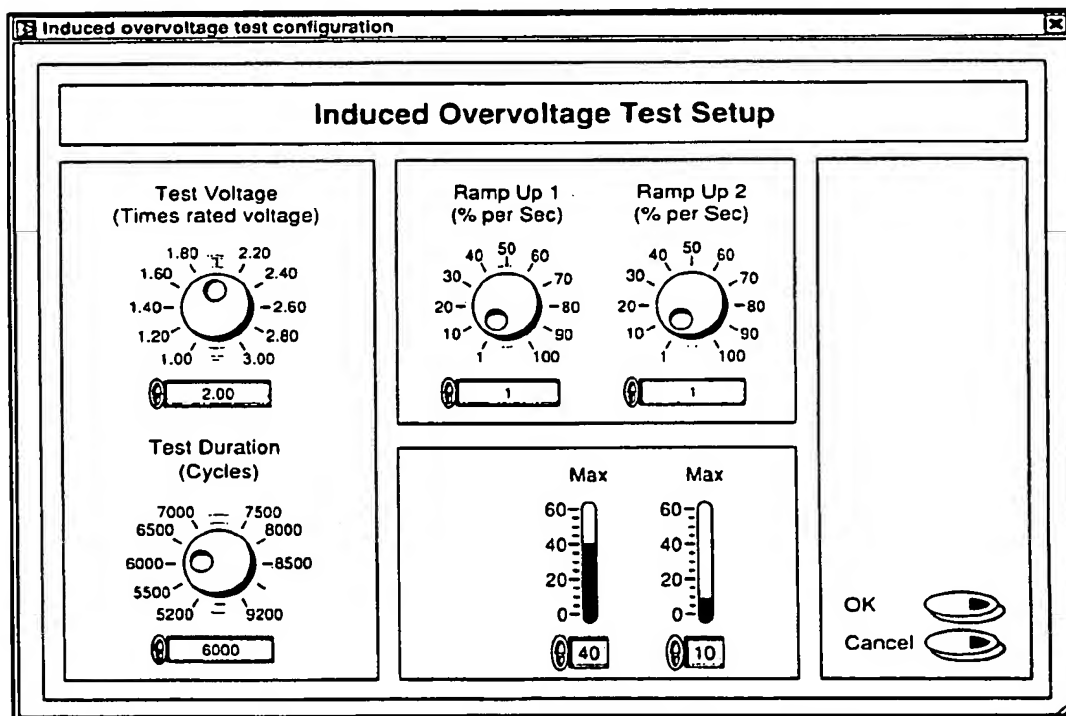


FIG. 6

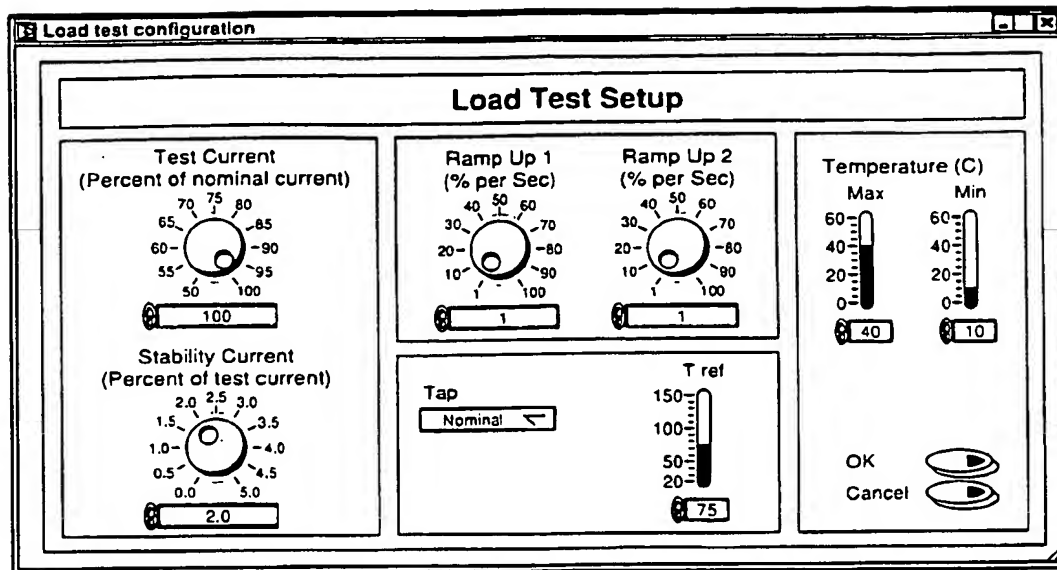


FIG. 7

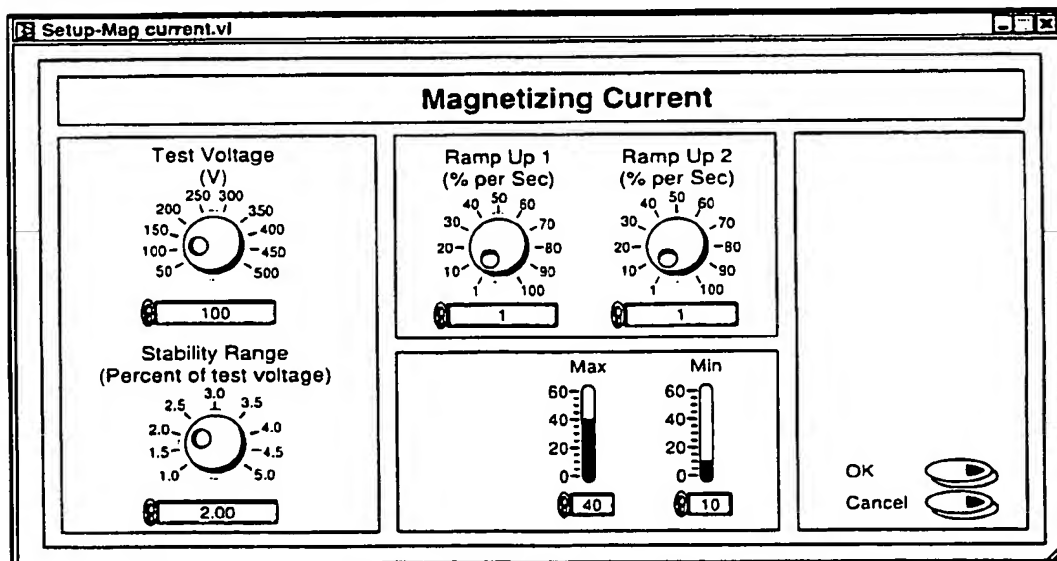


FIG. 8



Megger test configuration

Megger Test

Test Voltage (V)
2000 3000
1000 4000
0 5000
2500

Test Duration (Seconds)
100 150 200
50 250 300
60

Measurements
15
60
Add
Delete

Time
0
Add
Delete

Temperature (C)
Max Min
60 60
40 40
20 20
0 0
40 10

OK
Cancel

FIG. 9

No load test configuration

No Load Test Setup

Test Voltage (Percent of nominal voltage)
85 90 95
80 100
75 105
70 110
100

Stability Range (Percent of test voltage)
2.5 3.0 3.5
2.0 4.0
1.5 4.5
1.0 5.0
2.00

Ramp Up 1 (% per Sec)
40 50 60
30 70
20 80
10 90
100

Ramp Up 2 (% per Sec)
40 50 60
30 70
20 80
10 90
100

Temperature (C)
Max Min
60 60
40 40
20 20
0 0
40 10

☒ Correct?

T ref
150
100
50
0
20

OK
Cancel

FIG. 10



Ratio test configuration

Ratio Test Setup

Taps Tested

☐ All?

Taps

Nominal

Add

Delete

Max

40

Min

10

OK

Cancel

FIG. 11

Resistance test configuration

Resistance Test Setup

Test Current (%)

10.0

T ref

75

Temperature (C)

Max

40

Min

10

Taps Tested

☐ IEC?
☐ All?

Taps

Nominal

Add

Delete

OK

Cancel

FIG. 12



Automated Test			AIRB																												
Hardware Status		Test Results ○○○●●●●		Temperature 50 25 0 21.26																											
CT Tap <input type="button" value="All Open"/>	Step up tap <input type="button" value="No Tap"/>	Applied <input type="radio"/> Mag current <input type="radio"/>																													
PT Tap <input type="button" value="All Open"/>	Output mode <input type="button" value="50 Hz TTS"/>	<table border="1"><thead><tr><th>Side</th><th>V_i</th><th>Status</th></tr></thead><tbody><tr><td></td><td></td><td></td></tr></tbody></table>		Side	V _i	Status																									
Side	V _i	Status																													
Megger switch <input type="radio"/>	Deck <input type="button" value="1"/> <input type="button" value="2"/> <input type="button" value="3"/>	Induced <input type="radio"/> Megger <input type="radio"/>																													
Visible disconnect <input type="radio"/>	Sw. Network <input type="button" value="Err"/> <input type="button" value="Err"/> <input type="button" value="Err"/>	<table border="1"><thead><tr><th>Side</th><th>V_i</th><th>Status</th></tr></thead><tbody><tr><td>OHG</td><td>2000</td><td>ERR</td></tr><tr><td>OHG</td><td>2500</td><td>ERR</td></tr></tbody></table>		Side	V _i	Status	OHG	2000	ERR	OHG	2500	ERR																			
Side	V _i	Status																													
OHG	2000	ERR																													
OHG	2500	ERR																													
Shorting switch <input type="radio"/>	Output energized <input type="radio"/>	Losses <input type="radio"/> Ratio <input type="radio"/>																													
Resistance H switch <input type="radio"/>	Emergency <input type="radio"/>	<table border="1"><thead><tr><th>V_i</th><th>Imp.</th><th>Status</th></tr></thead><tbody><tr><td>20396.0</td><td></td><td>ERR</td></tr></tbody></table>		V _i	Imp.	Status	20396.0		ERR																						
V _i	Imp.	Status																													
20396.0		ERR																													
Resistance L switch <input type="radio"/>	Error <input type="radio"/>	<table border="1"><thead><tr><th>Tap</th><th>Status</th></tr></thead><tbody><tr><td></td><td></td></tr></tbody></table>		Tap	Status																										
Tap	Status																														
Test Sequence		<table border="1"><thead><tr><th>V_i</th><th>Status</th></tr></thead><tbody><tr><td>254.1</td><td>ERR</td></tr></tbody></table>		V _i	Status	254.1	ERR																								
V _i	Status																														
254.1	ERR																														
<table border="1"><thead><tr><th>#</th><th>Test</th><th>Parameters</th></tr></thead><tbody><tr><td>1</td><td>Ratio</td><td>TM= 40 C; Tm= 10 C; TP= 30</td></tr><tr><td>2</td><td>Resistance</td><td>TC= 50 A; TN= 40 C; Tm= 10 C; TP= 40</td></tr><tr><td>3</td><td>Mag current</td><td>TV= 380 V; RU= 1 Vs; AT= 1; SR= 2.0%; TM= 40 C; T</td></tr><tr><td>4</td><td>Load test</td><td>TC= 100 %; RU= 1 Vs; AT= 1; SR= 2.0%; TM= 40 C; T</td></tr><tr><td>5</td><td>No load test</td><td>TV= 105 %; RU= 1 Vs; AT= 1; SR= 2.0%; TM= 40 C; T</td></tr><tr><td>6</td><td>Megger, HL</td><td>TV= 2500 V; TD= 60 s; TM= 40 C; Tm= 10 C; M1= 15 s</td></tr><tr><td>7</td><td>Megger, HG</td><td>TV= 2000 V; TD= 60 s; TM= 40 C; Tm= 10 C; M1= 15 s</td></tr></tbody></table>		#	Test	Parameters	1	Ratio	TM= 40 C; Tm= 10 C; TP= 30	2	Resistance	TC= 50 A; TN= 40 C; Tm= 10 C; TP= 40	3	Mag current	TV= 380 V; RU= 1 Vs; AT= 1; SR= 2.0%; TM= 40 C; T	4	Load test	TC= 100 %; RU= 1 Vs; AT= 1; SR= 2.0%; TM= 40 C; T	5	No load test	TV= 105 %; RU= 1 Vs; AT= 1; SR= 2.0%; TM= 40 C; T	6	Megger, HL	TV= 2500 V; TD= 60 s; TM= 40 C; Tm= 10 C; M1= 15 s	7	Megger, HG	TV= 2000 V; TD= 60 s; TM= 40 C; Tm= 10 C; M1= 15 s	<table border="1"><thead><tr><th>Tap</th><th>Status</th></tr></thead><tbody><tr><td></td><td></td></tr></tbody></table>		Tap	Status		
#	Test	Parameters																													
1	Ratio	TM= 40 C; Tm= 10 C; TP= 30																													
2	Resistance	TC= 50 A; TN= 40 C; Tm= 10 C; TP= 40																													
3	Mag current	TV= 380 V; RU= 1 Vs; AT= 1; SR= 2.0%; TM= 40 C; T																													
4	Load test	TC= 100 %; RU= 1 Vs; AT= 1; SR= 2.0%; TM= 40 C; T																													
5	No load test	TV= 105 %; RU= 1 Vs; AT= 1; SR= 2.0%; TM= 40 C; T																													
6	Megger, HL	TV= 2500 V; TD= 60 s; TM= 40 C; Tm= 10 C; M1= 15 s																													
7	Megger, HG	TV= 2000 V; TD= 60 s; TM= 40 C; Tm= 10 C; M1= 15 s																													
Tap	Status																														
		Commands <input type="radio"/> Start <input type="radio"/> Stop <input type="radio"/> Reset <input type="radio"/> Change TUT																													
		Screen <input type="radio"/> Hardware status <input type="radio"/> Details <input type="radio"/> Exit																													

FIG. 13